



Cigent pre-boot authentication (PBA) and  
Cigent Secure SSD

## **Cigent Single and Multidrive PBA Installation Guide and User Manual**

Feb 2025  
Build 53  
PBA Version 1.0.6

---

## 1 Table of Contents

2	Introduction	3
3	Initial Installation	4
3.1	Initial installation overview .....	4
3.2	Drive installation .....	4
3.3	Configure UEFI and BIOS Settings .....	4
3.4	Operating System installation .....	5
3.5	Create a bootable USB 3.0 thumb drive .....	5
3.6	Boot to the USB thumb drive .....	5
3.7	Install the PBA .....	6
3.7.1	Primary and Secondary drive overview.....	6
3.8	Initial login.....	9
4	Using the Administrative Console	10
4.1	Dashboard .....	11
4.2	Maintenance .....	12
4.2.1	Disable PBA.....	12
4.2.2	Uninstall PBA .....	13
4.2.3	Erase Entire Disk.....	13
4.3	Users.....	15
4.3.1	Authentication options and requirements.....	16
4.3.2	Add User .....	16
4.3.3	Edit User .....	17
4.3.4	Remove User .....	18
4.4	Drives.....	19
4.4.1	View protected drives .....	19
4.4.2	Remove Secondary drive(s).....	19
4.4.3	Add Secondary drive(s).....	21
4.4.4	Import Secondary drive(s) .....	22
4.5	Settings.....	26
4.5.1	Settings - Login .....	26
4.5.2	Settings - Password .....	27
4.5.3	Settings - Other.....	28

5	Reinstallation of the Cigent PBA	29
6	Re-enabling the Cigent PBA	32
7	Updating the Cigent PBA software	33
8	Logging in and Logging Out	34
	8.1 Logging in with a username and password.....	34
	8.2 Logging in with a Smart Card .....	35
	8.3 Logging in with a Security Key.....	<b>Error! Bookmark not defined.</b>
	8.4 Logging in with Two Factor Authentication .....	36
	8.5 Logging out of the PBA Administrative console.....	37
9	Troubleshooting	38
	9.1 Replacing or recovering from a drive failure .....	38
	9.1.1 Replacing or recovering from a failed secondary drive. ....	38
	9.1.2 Replacing or recovering from a failed primary drive. ....	38

## Known Issues

1. Caps Lock and Num Lock do not light up when active, however they are working properly.

## 2 Introduction

When combined with a supported self-encrypting drive (SED) like the Cigent Secure SSD, Cigent pre-boot authentication (PBA) creates a highly secure data at rest (DAR) solution protecting data against unauthorized access.

Before starting any operating system or virtual machine stored on the drive users must first authenticate using a username/password, smart card or security key. Users remain authenticated until the drive is powered off.

The following guide helps you install the Cigent Secure SSD(s) and Cigent PBA software. It also details how to configure users and options in the PBA administrative console.

## 3 Initial Installation

### 3.1 Initial installation overview

You can obtain a copy of the PBA software from:

- <https://support.cigent.com> After registering, the download will be available under the Cigent PBA section.
- If you have a Data Defense subscription, you can download the Cigent PBA from the downloads page of the Cigent Management console.

### 3.2 Drive installation

Install the Cigent Secure SSD(s) into your system following your computer manufacturer's instructions.

### 3.3 Configure UEFI and BIOS Settings

Prior to installation of the PBA software, it is important to ensure certain bios settings are configured properly. Incorrect configuration may prevent installation altogether or disable certain features within the PBA afterwards.

Not every setting is supported by every manufacturer. If the setting is not supported by your BIOS, it can be ignored.

#### **SATA/NVMe Operation – AHCI (REQUIRED)**

SATA/NVMe Operation sets the operating mode of the integrated storage device controller with a choice between AHCI (Advanced Host Controller Interface) and RAID (Redundant Array of Independent Disks.) It is usually found under the Storage section of the BIOS. This must be set to AHCI for the PBA software to recognize the SED.

#### **Block SID Authentication - OFF (REQUIRED)**

TCG storage devices (like self-encrypting drives) will block all attempts to authenticate the SID authority. This is a security mechanism that prevents malicious software from placing a password on the drive preventing access. Once PBA is installed, this protection is no longer required as the software will set the password appropriately as part of installation. Note that setting this off is not always permanent therefore install the PBA on the next restart otherwise it may set back to on automatically.

#### **Secure Boot – ON (RECOMMENDED)**

Prevents unauthorized operating systems from running at boot time. Setting Secure Boot to ON is a best practice and although it is not required for installation of the PBA, it is required if you plan to use the TPM authentication option.

## 3.4 Operating System installation

Install any operating system or virtual machines.

## 3.5 Create a bootable USB 3.0 thumb drive

To install the Cigent PBA you will need to create a bootable USB thumb drive containing the Cigent PBA software. Cigent provides a utility to help you create a bootable usb thumb drive containing the Cigent PBA software. Warning: All data on the USB thumb drive will be erased.

NOTE: You can use the same usb thumb drive to install multiple drives which means you only have to create the usb drive once.

1. Extract the file from the provided zip and ensure all files remain in the same directory.
2. Insert a USB 3.0 thumb drive into your computer.
3. Start an Administrator command window and change directory to the location of loader software.
4. Run PBALoader.exe -i
5. Choose the number next to the correct USB thumb drive (if more than 1 )
6. Select 1 for Load operation.
7. You should see 2 entries. Type the number next to pba\_v1.0.6.53.bin and press enter.  
Note: The custom\_pba\_v1.0.6.53.bin is a Cigent Self-Signed version requiring keys (provided) be imported into the bios secure boot menu prior to running installer.  
Contact support for additional information.
8. Confirm your selection by typing 'YES' then enter.

The process can take several minutes to complete. Once successful you may remove the USB thumb drive and proceed to the next step.

## 3.6 Boot to the USB thumb drive


1. Ensure the power is turned off.
2. Insert the bootable USB thumb drive into the computer with the Cigent Secure SSD.
3. Turn on the computer and press the appropriate key for your computer to display the boot menu. The typical keys are F1, F2, F10, F12 or Esc.
4. Choose the USB thumb drive from the menu and proceed to boot.

## 3.7 Install the PBA

### 3.7.1 Primary and Secondary drive overview


The PBA can protect multiple drives with a single installation. In a system with more than one protected drive, one drive will be designated primary, and the others will be secondary. The PBA installs and boots from the primary drive. Secondary drives can be added, removed and imported from other installations. During installation, the admin must designate a primary drive. The impact of being primary affects the process of replacement or recovery from a drive failure. Regardless of whether a primary or secondary drive fails, the system can be recovered.

1. The Secure Setup screen will be displayed.

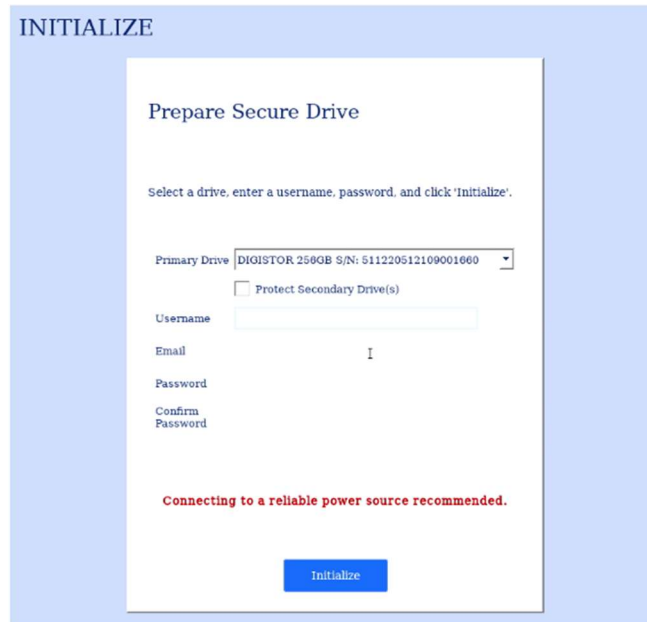


The screenshot shows a web-based interface titled "INITIALIZE" with a sub-header "Prepare Secure Drive". Below the sub-header, there is a instruction: "Select a drive, enter a username, password, and click 'Initialize'." The form includes a "Primary Drive" dropdown menu currently showing "DIGISTOR 250GB S/N: 511220512109001060". There is a checkbox labeled "Protect Secondary Drive(s)" which is currently unchecked. Below these are input fields for "Username", "Email", "Password", and "Confirm Password". A red warning message at the bottom states "Connecting to a reliable power source recommended." and a blue "Initialize" button is at the very bottom.

2. Select a primary drive. The primary drive is the location the PBA software will be installed and from which the system will boot.
3. On a system with more than one drive:
  - a. Select a primary drive. The primary drive is the location the PBA software will be installed and from which the system will boot.
  - b. Check "Protect Secondary Drives" to open the Add Secondary Drives dialog.

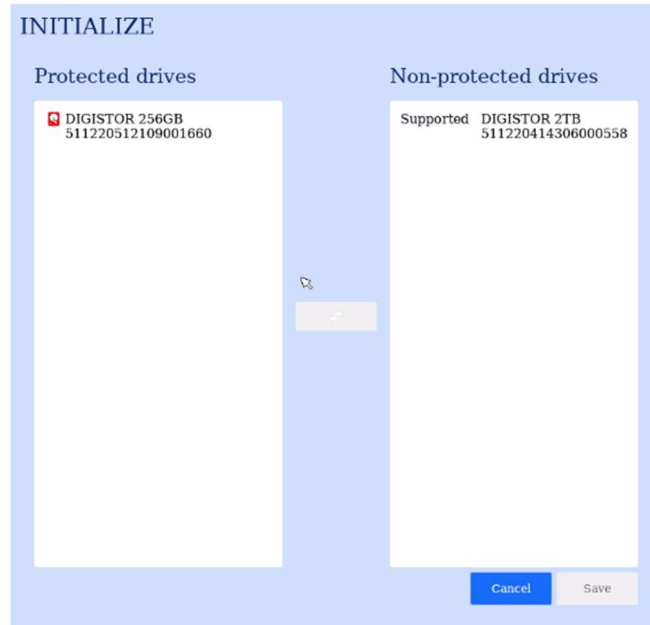

- c. Select drives from the Non-protected drives list and click the double arrow button to move them to Protected drives.

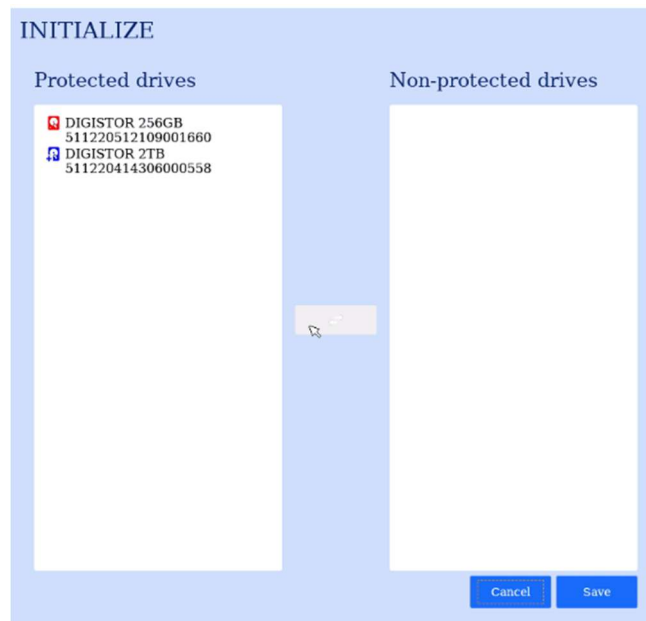

- d. Select the secondary drives to protect and click Save.
4. Enter a username, email (optional) and password. (See Username and Password Requirements in Add User section for details.)
5. Then click Initialize.

INITIALIZE

Prepare Secure Drive

Select a drive, enter a username, password, and click 'Initialize'.

Primary Drive

☒ Protect Secondary Drive(s)

Username

Email

Password

Confirm Password

Connecting to a reliable power source recommended.

The installation process can take 10 minutes or more. Do not interrupt or power off the computer during this time.

Step 5 of 5: Preparing Pre-Boot Area 2% Complete

INITIALIZE

☒ Initialization Complete

Click 'OK' to shut down.

Once complete, power off the computer.


**Your PBA is now installed and ready for use.**

Remove the USB thumb drive and power up the system.

## 3.8 Initial login

The user credentials used to install the PBA software have administrative role by default. You should login at least once before entering the administrative console to test if the system successfully starts the operating system.

1. Turn on the computer. The Cigent PBA will automatically load.
2. On the login screen, enter the credentials you used during the PBA installation process.
3. Click Log In.

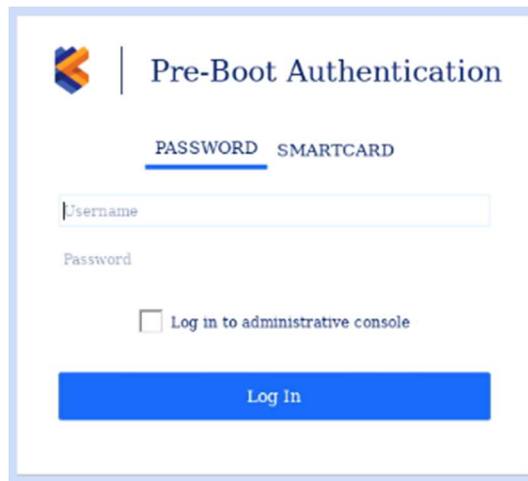
The image shows a 'Pre-Boot Authentication' login screen. At the top left is a logo consisting of two overlapping squares, one blue and one orange. To the right of the logo is the title 'Pre-Boot Authentication'. Below the title are two tabs: 'PASSWORD' (which is underlined) and 'SMARTCARD'. Under the 'PASSWORD' tab, there is a text input field labeled 'Username' and another labeled 'Password'. Below these fields is a checkbox labeled 'Log in to administrative console'. At the bottom of the form is a large blue button labeled 'Log In'.

For details on how to log in to the administrative console, see section [Using the Administrative Console](#).

## 4 Using the Administrative Console

The administrative console allows administrators to manage users, perform maintenance tasks, and view activity logs pertaining to the PBA environment.

You can enter the administrative console from the login page by checking the “Log in to administrative console” checkbox before clicking Log In.

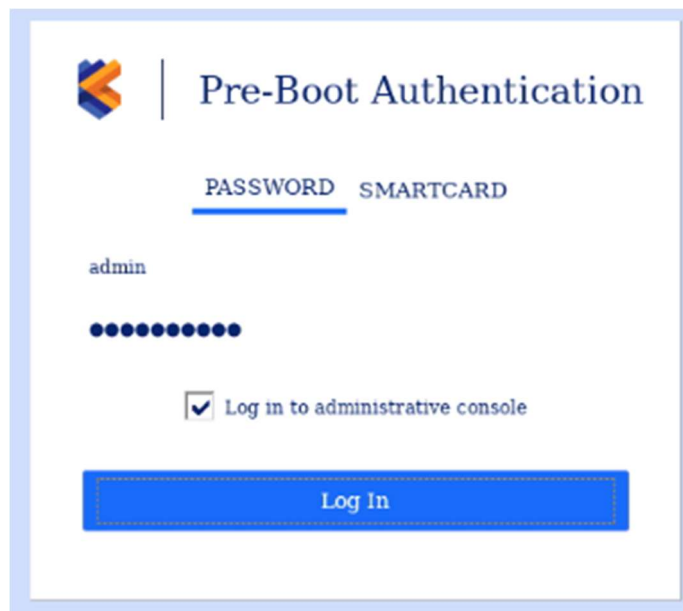

The image shows a Pre-Boot Authentication (PBA) login screen. At the top left is a logo consisting of two overlapping squares, one blue and one orange. To the right of the logo is the text "Pre-Boot Authentication". Below this, there are two tabs: "PASSWORD" and "SMARTCARD". The "PASSWORD" tab is selected and underlined. Under the "PASSWORD" tab, the username "admin" is entered. Below the username is a password field represented by a series of black dots. Below the password field is a checkbox that is checked, with the text "Log in to administrative console" next to it. At the bottom of the form is a blue button with the text "Log In".

## 4.1 Dashboard

The administrative console allows you to manage users, perform maintenance tasks and view activity logs pertaining to the PBA environment.

The dashboard features a top navigation bar with the following menu items: DASHBOARD, MAINTENANCE, USERS, DRIVES, SETTINGS, and HELP. The main content area is divided into three sections:

- Activity Log:** A table displaying a list of activities in chronological order, with the most recent at the top. Each entry includes a timestamp, a user icon, the username, and the action performed.
 

08-09 10:26	admin	Log in successful
08-08 17:28	admin	Logged out
08-08 15:45	admin	Log in successful
08-08 15:38	admin	Logged out
08-08 15:38	admin	Modified user admin
08-08 15:37	admin	Deleted user user2
08-08 15:37	admin	Deleted user user1
08-08 15:37	admin	Log in successful
08-08 15:21	admin	Logged out
08-08 13:56	admin	Log in successful
08-07 20:23	admin	Logged out
08-07 17:06	admin	Added user user2
08-07 17:05	admin	Added user user1
08-07 14:26	admin	Log in successful
08-07 14:25	admin	Logged out
08-07 14:25	admin	Log in successful
08-07 13:42	admin	Logged out
08-07 13:41	admin	Log in successful

 A "Purge Logs" button is located at the bottom of this section.
- Activity Summary (Last 7 days):** A summary box showing the following statistics:
  - Logins: 7
  - Failed Logins: 0
  - User Additions: 2
  - User Edits: 1
  - User Deletions: 2
- Installation Overview:** A box providing system information:
  - Current version: v1.0.6.26
  - Protected drives: 2
  - Total Users: 1
  - License: Perpetual

The dashboard shows PBA related activity in time order with the most recent activity at the top. Administrators can see all activity while normal users can only see activity for which they are the subject of the activity. Administrators can also purge the logs as desired.

The following activities are recorded:

- ✓ Successful login
- ✓ Failed Login
- ✓ Logoff successful
- ✓ Added user
- ✓ Edited user
- ✓ User deleted
- ✓ Authentication Keys Change

The Summary widget provides version and user login information as well as a summary of user activity for the last 7 days.

## 4.2 Maintenance


The maintenance page allows administrators to uninstall the PBA environment, disable the PBA, and completely erase the drive.



### 4.2.1 Disable PBA

Disabling the PBA temporarily allows the system to boot directly to the operating system without the need to authenticate. This can be useful for administrators during update operations that require repeated restarts of the system. All settings and configuration will be preserved while disabled. Re-enabling the PBA will require authentication as an existing administrative user. See Re-enable PBA for details.

Multidrive systems: Enable *Include secondary drives* option(recommended) to temporarily remove protection from non-primary drives in addition to the primary.

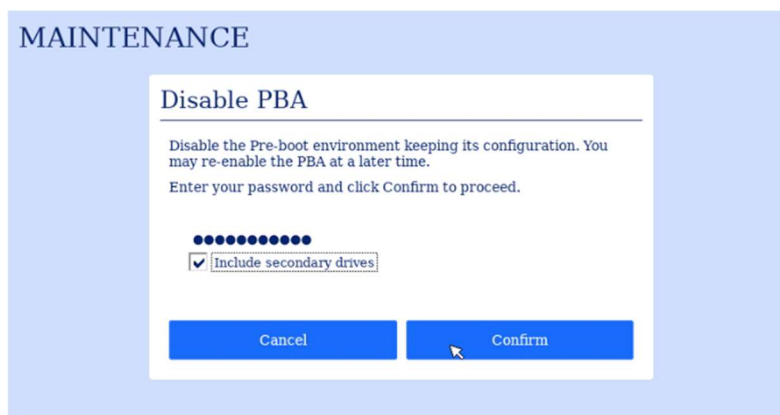


1. Click *Disable PBA*.
2. Enter your administrator password.
3. Click *Confirm*.

#### 4.2.2 Uninstall PBA

You can completely uninstall the Cigent PBA software which removes all files, configuration and user information. Your operating system environment will be preserved and boot normally.

Multidrive systems: Enable *Include secondary drives* option(recommended) to remove protection from non-primary drives in addition to the primary.

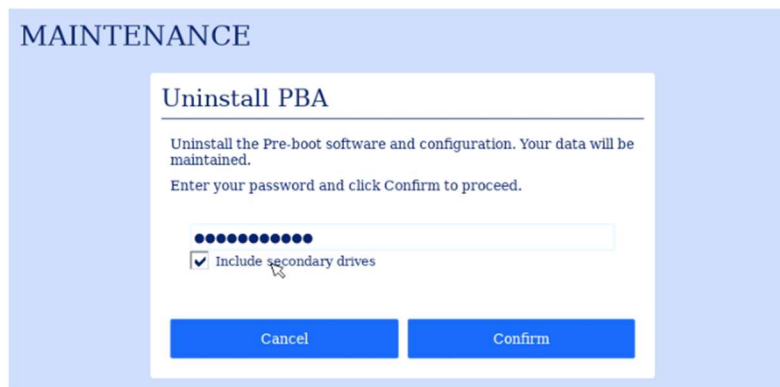


1. Click *Uninstall PBA*.
2. Enter your administrator password.
3. Click *Confirm*.

**WARNING:** The uninstallation of the PBA proceeds immediately after clicking *Confirm*.

#### 4.2.3 Erase Entire Disk

The Erase Entire Drive feature allows administrators to reset the drive(s) back to factory state and ensures all data on the disk is completely erased and unrecoverable. Once complete, the drive can be safely repurposed.

Multidrive systems: Enable *Include secondary drives* option(recommended) to erase non-primary drives in addition to the primary.

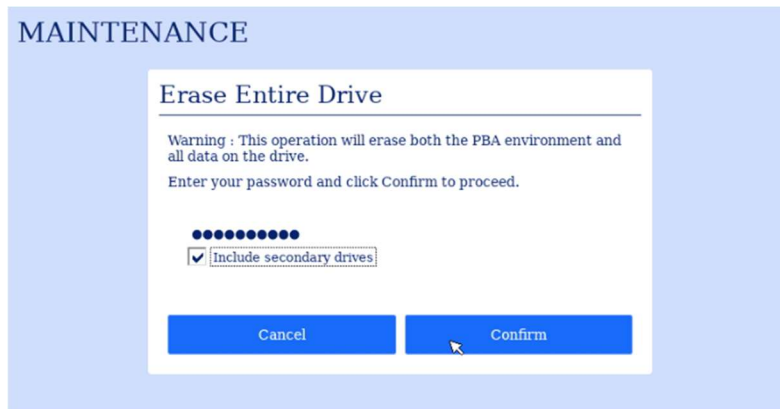

The following actions are performed during the Erase Entire Disk procedure:


- The Data Encryption Key (DEK) of the SED is changed. This is also known as Crypto-Erase.
  - The PBA executes a Format NVM with the sanitize option. The Cigent Secure SSD has an enhanced feature called Full Flash Overwrite which will zero every block on the drive.
  - The Erase Verification firmware feature is used to ensure all mapped and unmapped blocks have been erased.
1. Click *Erase Entire Disk*.
  2. Enter your administrator password.
  3. Click *Confirm*.

**WARNING:** The **Erase Entire Drive** proceeds immediately after clicking Confirm and cannot be stopped or canceled.

Once complete, power off the system.

## 4.3 Users

The Users page allows administrators to add, modify, and delete user accounts from the PBA environment. Non-administrative users can use this page to change their password and modify other forms of authentication.

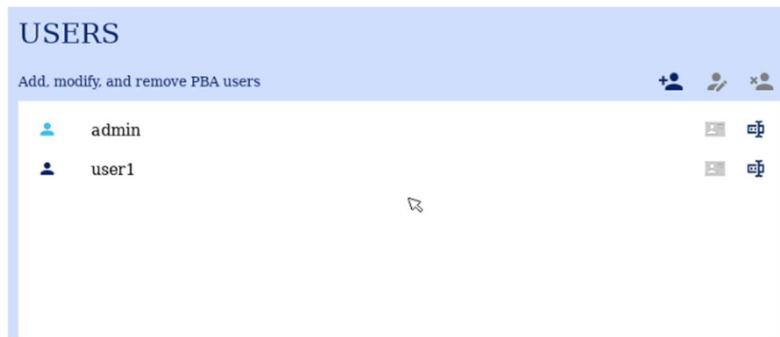

### *Roles and Capabilities*

Capability	Administrator Role	User Role
Purge Logs	Yes	No
Uninstall PBA	Yes	No
Change Authentication Keys	Yes	No
Erase Entire Drive	Yes	No
Add User	Yes	No
Edit User	Yes	Only their own
Remove User	Yes	No
Modify Settings	Yes	No

### 4.3.1 Authentication options and requirements

Each PBA user can be configured with three different authentication options including password, smartcard and security key. Password is always required. Smartcard and security key authentication are optional. As of this release, only Smartcard can be used for a two-factor authentication setup (requiring both a password and smartcard to succeed.) Security key will be added as an option in an upcoming release.

#### Password Requirements

Requirement	Username	Password
Length	1-40	8-128
Uppercase letter: A-Z	May contain	Must contain at least 1
Lowercase letter: a-z	May contain	Must contain at least 1
Number: 0-9	May contain	Must contain at least 1
Special character: ~! @\$%^&*()_+=[:<>.	May contain	Must contain at least 1

### 4.3.2 Add User

The Add User page is used to add a new user using password, smartcard or security key. If the “Require Two-Factor Authentication” setting is set to Yes, all newly added users must have both password and smartcard.

**USERS**

**Add User**

Username: user3

Administrator: No ☐ Yes ☐

Email:

New Password:

Confirm Password:

Smart Card: No Smart Card(s) Found

1. Enter a unique username.

2. Set the Administrator role as desired.
3. Enter an email address. (Optional)
4. Enter and confirm a password.
5. (Optional) Select the smart card certificate from the menu and enter the PIN.
6. (Optional) Select the Security key. Choose Auto, Touch or PIN.
7. Click *Add*.

Click the Scan button next to Smartcard or Security Key if your device is not listed after inserting the card or key.

#### 4.3.3 Edit User

The Edit User page is used by administrators to make changes to any user in the system including themselves. It is also used by non-administrators to change their own password.

Administrators can change the following user attributes:

- Role
- Email Address
- User Password
- Add or Remove a Smart Card

The screenshot shows a web interface titled "USERS" with a sub-header "Edit User". The form contains the following fields and controls:

- Username:** user2
- Administrator:** No ☐ Yes ☐
- Email:** (empty text input)
- New Password:** No Change
- Confirm Password:** No Change
- Smart Card:** ☐ Add ☒ No Change

At the bottom right, there are two buttons: "Cancel" (blue) and "Save" (grey).

1. Select an existing user from the table and click the edit user icon.
2. Change one or more user attributes.
3. Click Save.

Note that to Add a Smart Card or Security Key to an existing user, the device should be inserted before entering the page. If you do not see the device listed after inserting it, click Scan.

#### 4.3.4 Remove User

Removing a user will permanently delete a user from the PBA environment. Users will no longer be able to authenticate to the PBA to access the protected operating system nor the PBA administrative console.

1. Select an existing user or users from the table and click the remove user icon.



2. Click Remove.




## 4.4 Drives

The Drives page shows information about the drive(s) being protected by the PBA. On systems with more than one drive this page allows administrators to add, remove and import drives from the environment. The standard license allows up to 5 drives in a non-hardware RAID configuration.

### 4.4.1 View protected drives


The *Protected drives* column shows details of the drives under the protection of PBA including model number and serial number. The primary drive is indicated with a red icon and all secondaries, if present, are blue. The *Non-protected drives* column shows drives recently removed from protection or available to import. Selecting one or more drives and clicking the double arrow button will move drives between columns. When updates are complete, click the *Save* button.

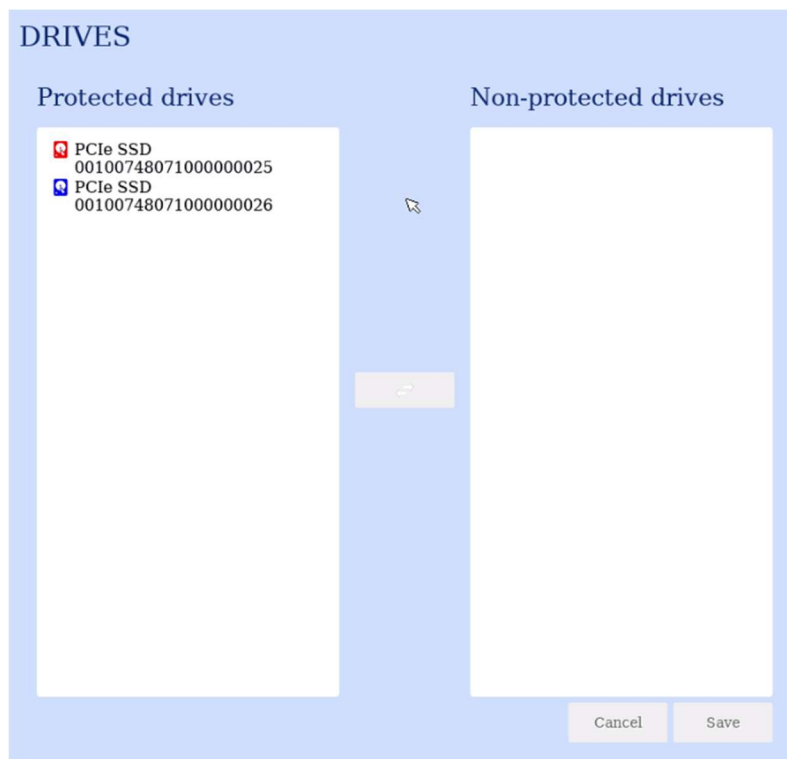


### 4.4.2 Remove Secondary drive(s)

To remove protection from a secondary drive(s) perform the following.

1. Select one or more secondary drives from the *Protected drives* column.
2. Click the double arrow button.

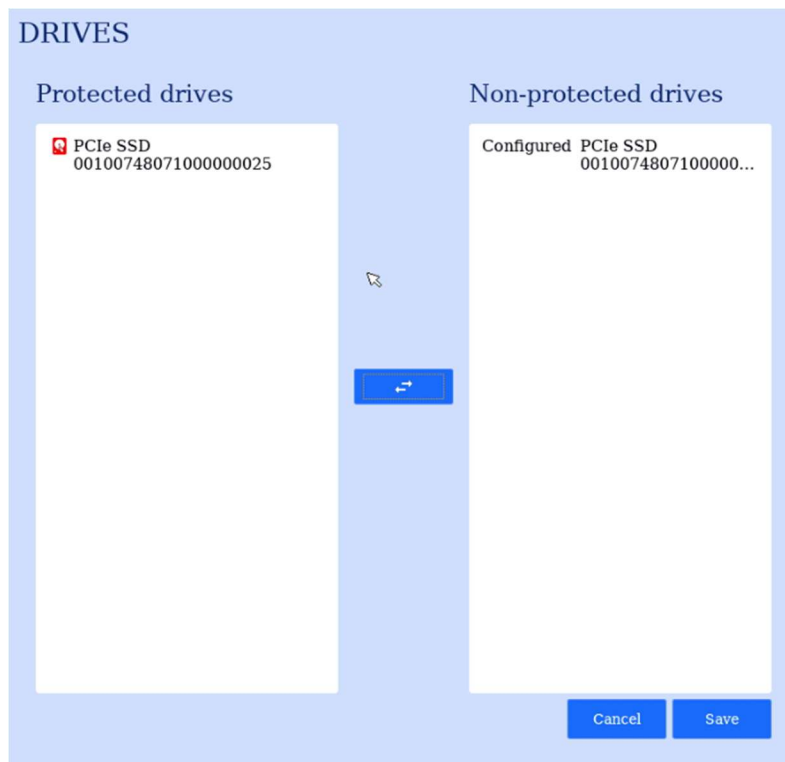

3. Click Save
4. Enter your password and click Confirm.

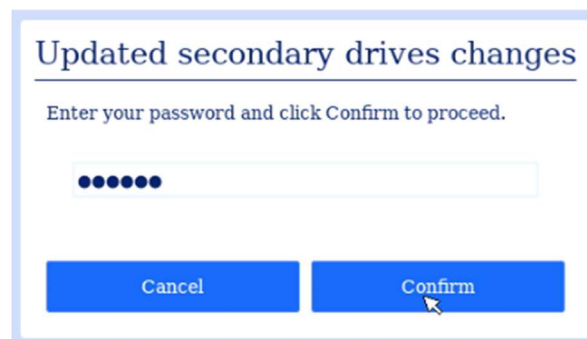


The drive will now show as Supported indicating it is no longer protected but could be added to the protected drives list.




#### 4.4.3 Add Secondary drive(s)

If an additional drive was added to the system or you wish to add a previously removed drive back under protection, perform the following.


1. Select one or more drives shown as Supported from the Non-Protected column.

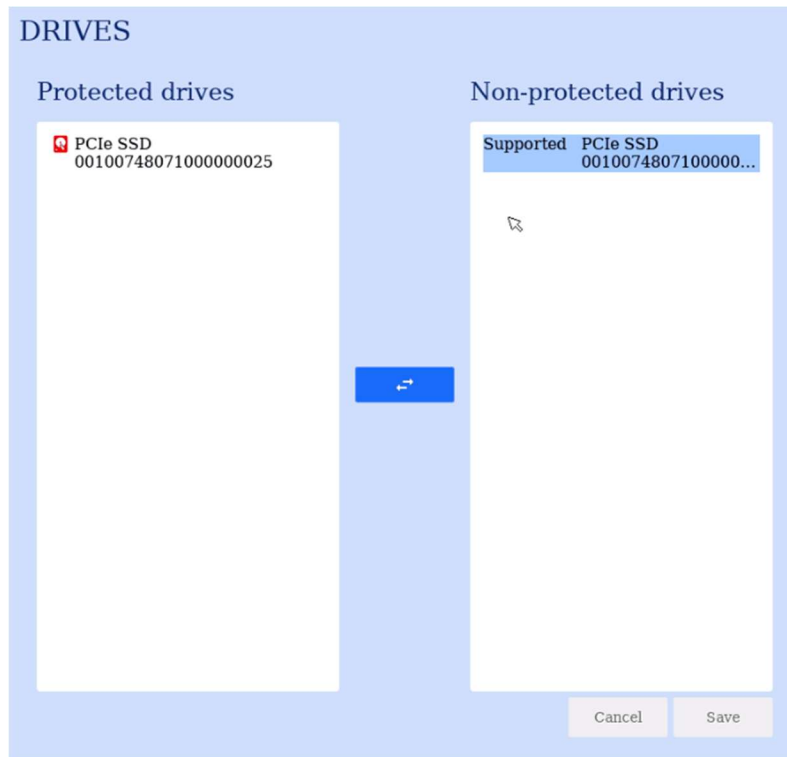

2. Click the double arrow button to move the drive(s) to the *Protected drives* column.

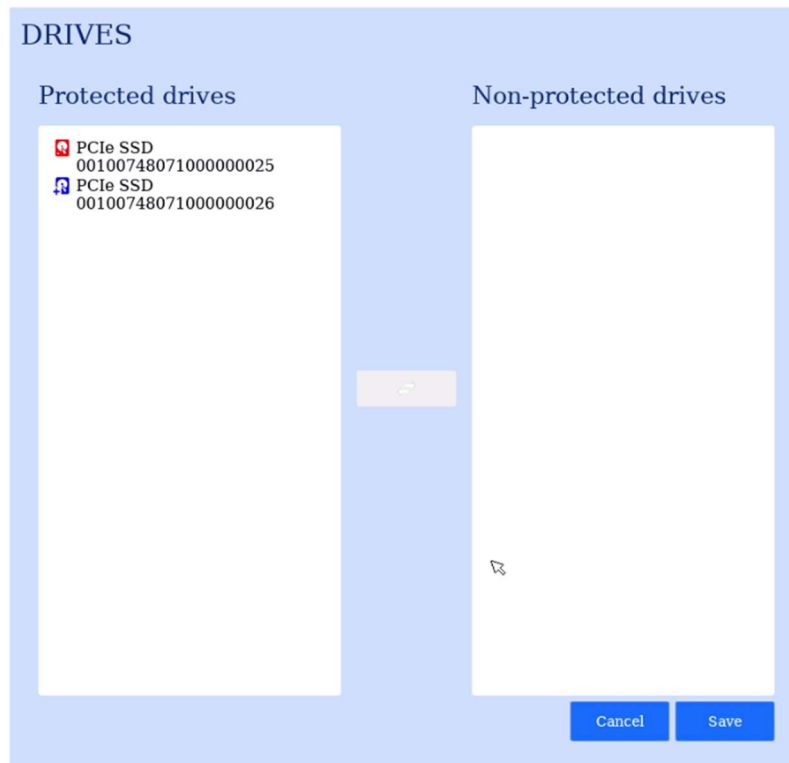


3. Click Save.
4. Enter your password and click Confirm.

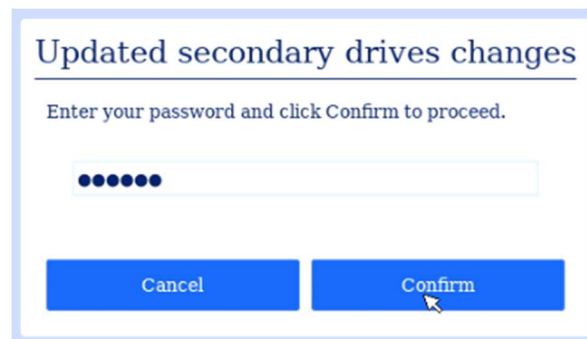


#### 4.4.4 Import Secondary drive(s)

You can import secondary drives that were protected in another system. You would also use the import capability if the primary drive was removed or had failed and needed to be replaced. (See Troubleshooting section at the end of this document.)


1. Select one or more drives labeled Importable from the Non-protected drive list.

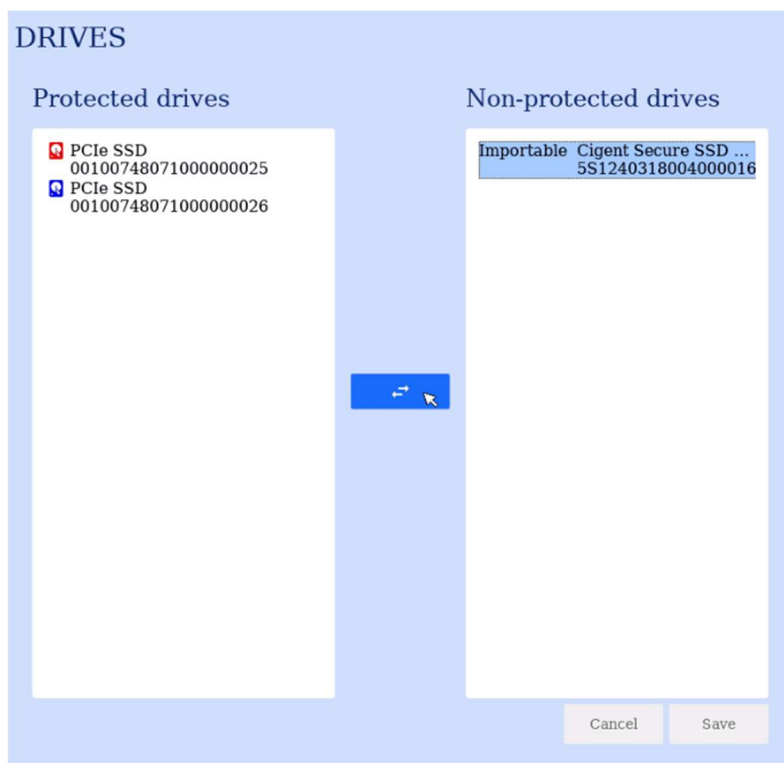

2. Click the double arrow button to move the drive to the Protected drives column.

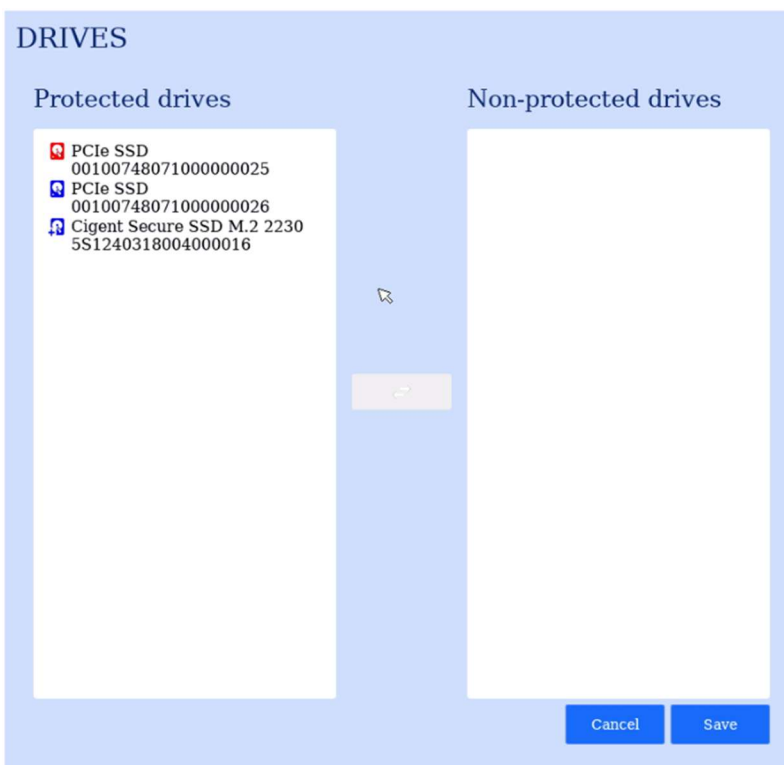

3. Click Save.
4. Enter your password and click Confirm.

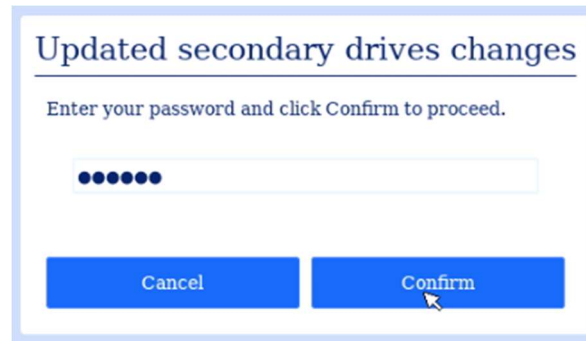


Updated secondary drives changes

Enter your password and click Confirm to proceed.


•••••

Cancel Confirm

5. Click Ok.

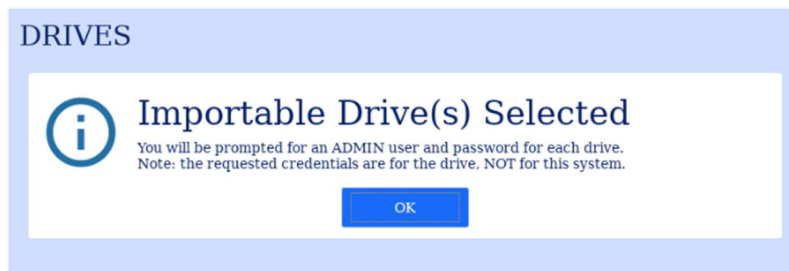


DRIVES


 **Importable Drive(s) Selected**

You will be prompted for an ADMIN user and password for each drive.  
Note: the requested credentials are for the drive, NOT for this system.

OK

6. Enter administrator credentials from the source PBA then click Continue. (NOTE: These are the credentials from the PBA installation where this drive was originally configured, not the credentials for the running PBA.)

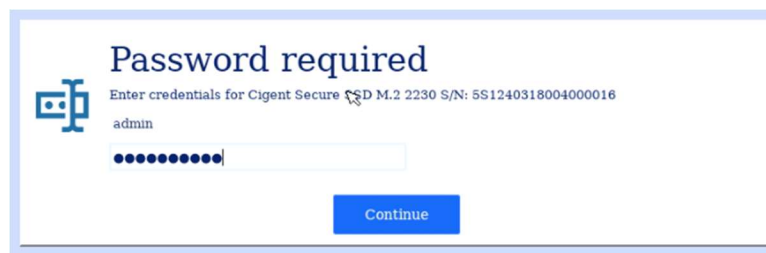

 **Password required**

Enter credentials for Cigent Secure SSD M.2 2230 S/N: 5S1240318004000016


admin

•••••


Continue

7. Click Continue. Repeat for each drive selected.


8. Click Ok.

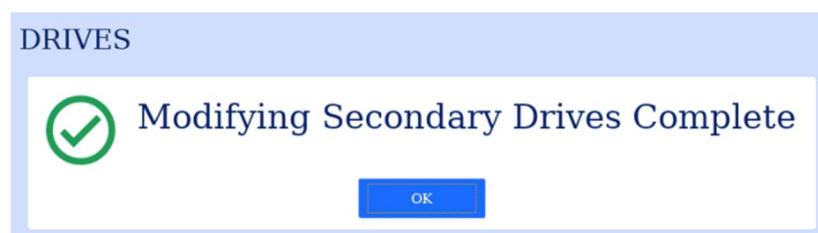

DRIVES

 **Modifying Secondary Drives Complete**

OK

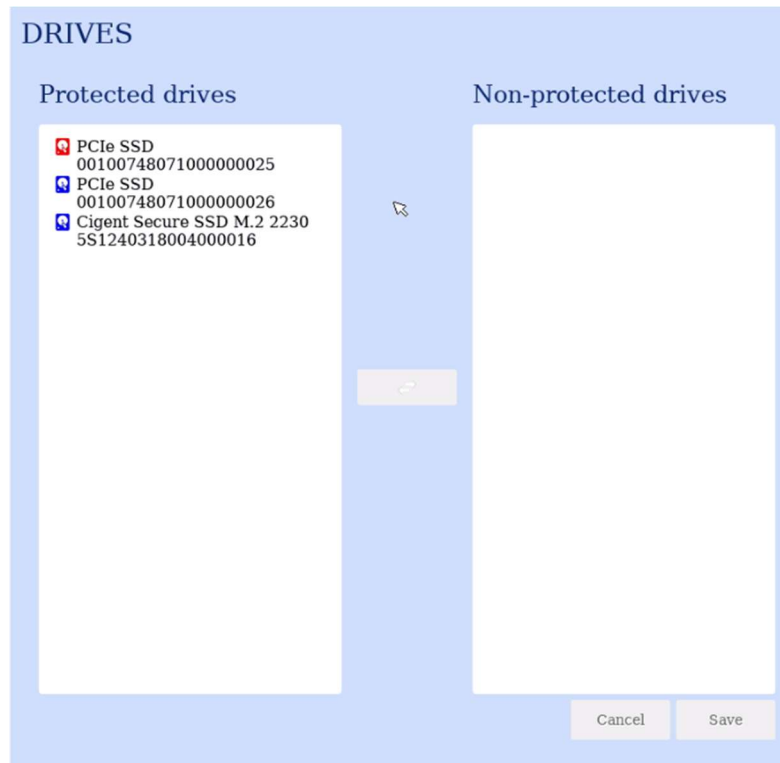

## 4.5 Settings

The Settings page allows administrators to customize certain behavior of the application to match their security requirements. After changing settings, be sure to click Save to update the system.

### 4.5.1 Settings - Login

**SETTINGS**

LOGIN PASSWORD

**Failed logins before logout**  
Maximum login attempts before logout (1-9) 5

**Failed logins before erase**  
Maximum login attempts before drive erasure (0 = disable ; 0-999) 0

**Require multiple forms of authentication**  
Require both password and additional factor to log in (all users) Disabled

**Enable remember me**  
Allow option on log in screen to remember last user signed in

#### Failed logins before logout

The number of consecutive failed login attempts (across all users) before a restart is required. Only attempts with valid usernames are considered towards failures.

*Min: 1 Max: 10*

#### Failed logins before erase

The number of consecutive failed login attempts before the disk is automatically erased. Only attempts with valid usernames are considered towards failures.


*Min: 0 (Disabled) Max: 999*

#### Require multiple forms of authentication


Require both password and smartcard authentication to log in. This can only be enabled if all currently defined users have both a password and smart card configured. If some users do not, you must require that they configure a smartcard or delete the user first.

#### Enable remember me

Enabling this setting will display an additional option on the PBA Login screen to automatically fill in the username field with the last successful login's username. This is a time saving feature on systems where the same user logs in on a regular basis.

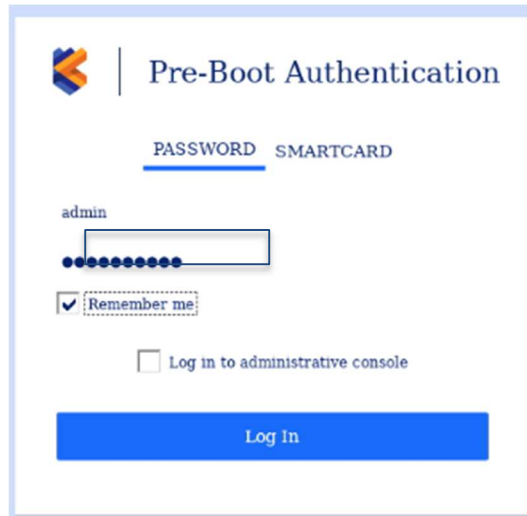The image shows a 'Pre-Boot Authentication' login screen. At the top left is a logo consisting of three colored squares (blue, orange, and yellow) arranged in a stylized 'C' shape. To the right of the logo is the title 'Pre-Boot Authentication'. Below the title are two tabs: 'PASSWORD' (which is selected and underlined) and 'SMARTCARD'. Under the 'PASSWORD' tab, there is a text input field containing the username 'admin'. Below the username field is a password field represented by a series of dots. Under the password field is a checkbox labeled 'Remember me' which is checked. Below that is another checkbox labeled 'Log in to administrative console' which is unchecked. At the bottom of the form is a large blue button labeled 'Log In'.

#### 4.5.2 Settings - Password

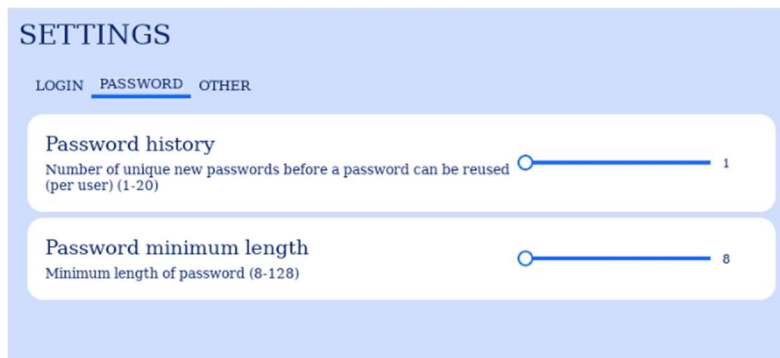The image shows a 'SETTINGS' screen with three tabs: 'LOGIN', 'PASSWORD' (which is selected and underlined), and 'OTHER'. Under the 'PASSWORD' tab, there are two configuration sections. The first section is titled 'Password history' and has a subtitle 'Number of unique new passwords before a password can be reused (per user) (1-20)'. It features a slider control with a blue track and a white handle, set to the value '1'. The second section is titled 'Password minimum length' and has a subtitle 'Minimum length of password (8-128)'. It also features a slider control with a blue track and a white handle, set to the value '8'.

##### **Password history**

The number of unique passwords per user before a password can be reused.

*Min: 1 Max: 20*

##### **Password minimum length**


The minimum password length required for each user. The requirement will be enforced the next time an existing user changes their password or a new user is added.

*Min: 1 Max: 128*

### 4.5.3 Settings - Other

#### Chain load operating system

Chain loading is when a boot loader loads another boot loader to begin the boot process. This process greatly reduces the time needed to start the target operating system. Currently, Cigent PBA supports chain loading to Linux only. Click Scan to initiate a search for available kernels on the boot drive. Once complete, select the desired kernel from the list and click Save.

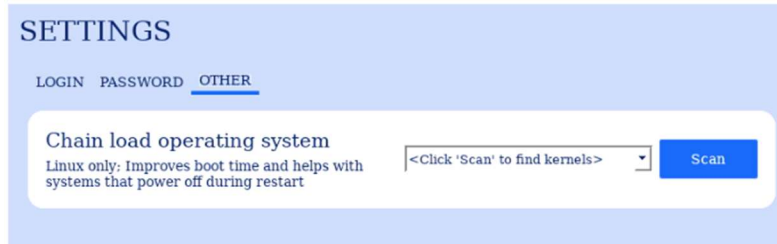

**SETTINGS**

LOGIN PASSWORD OTHER

**Chain load operating system**  
Linux only: Improves boot time and helps with systems that power off during restart

<Click 'Scan' to find kernels>

## 5 Reinstallation of the Cigent PBA

Reinstallation of the Cigent PBA software will be necessary if you used the **Erase Entire Drive** or **Uninstall PBA** features from the maintenance page or erased the drive using another utility.

The reinstallation process is the same as the process you followed to initially install the Cigent PBA.

1. Create a bootable USB thumb drive containing the Cigent PBA software. (See section [Create a bootable USB 3.0 thumb drive](#) )

**Note:** You can use the same bootable USB drive you used to enable the Cigent PBA if you still have it.

2. Boot from the USB thumb drive.
3. The Prepare Secure Drive screen will be displayed.

INITIALIZE

Prepare Secure Drive

Select a drive, enter a username, password, and click 'Initialize'.

Primary Drive: DIGISTOR 256GB S/N: 511220512109001000

☐ Protect Secondary Drive(s)

Username:

Email:


Password:

Confirm Password:


Connecting to a reliable power source recommended.

Initialize

4. On a system with more than one drive:
  - a. Select a primary drive. The primary drive is the location the PBA software will be installed and from which the system will boot.
  - b. Check "Protect Secondary Drives" to open the Add Secondary Drives dialog.

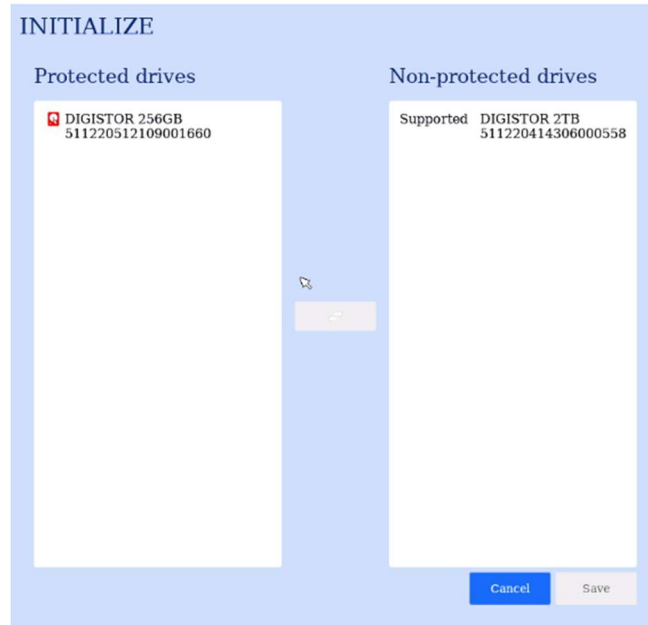

- c. Select some or all of the drives from the Non-protected drives list and click the double arrow button to move them to Protected drives.

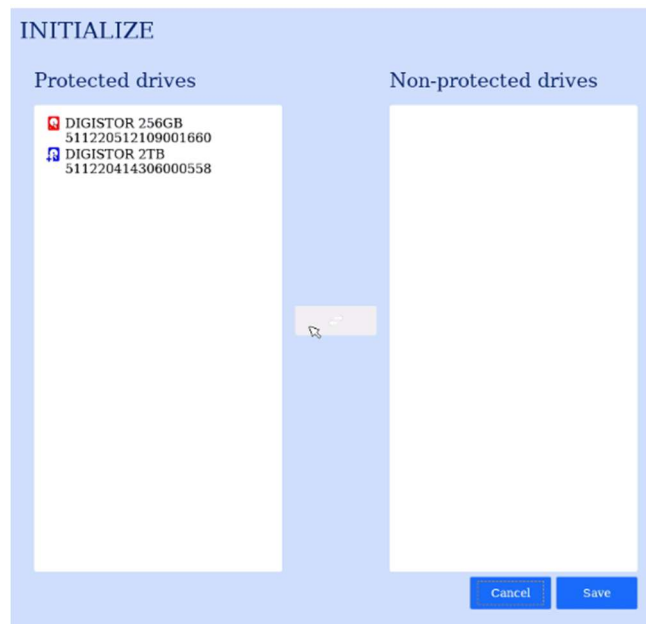

- d. Select the secondary drives to protect and click Save.
5. Enter a username, email (optional) and password. (See Username and Password Requirements in Add User section for details.)
6. Then click Initialize.

INITIALIZE

Prepare Secure Drive

Select a drive, enter a username, password, and click 'Initialize'.

Primary Drive: DIGISTOR 256GB S/N: 511220512109001660

☒ Protect Secondary Drive(s)

Username: admin

Email:

Password: ●●●●●●●●

Confirm Password: ●●●●●●●●

Connecting to a reliable power source recommended.

Initialize

The installation process can take 10 minutes or more. Do not interrupt or power off the computer during this time.

Step 5 of 5: Preparing Pre-Boot Area 2% Complete

INITIALIZE

Initialization Complete

Click 'OK' to shut down.

OK


Once complete, power off the computer.  
Remove the USB thumb drive from the computer.

## 6 Re-enabling the Cigent PBA


To re-enable PBA after temporarily disabling it from the maintenance page you will need the following:

1. An installation USB drive of the same version of Cigent PBA installed on the device  
(See section [Create a bootable USB 3.0 thumb drive](#))
2. Administrator credentials to the disabled PBA environment

When you are ready to re-enable the PBA boot to the USB drive. The system will detect that a PBA environment is already installed and present a reinstallation login screen.

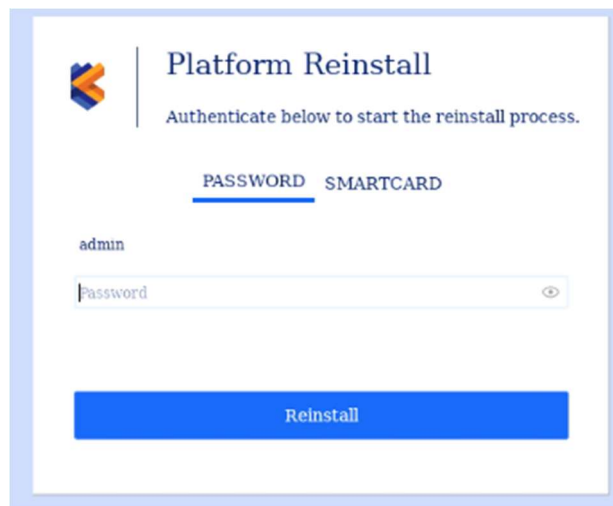The image shows a web-based login interface titled "Platform Reinstall". It features a logo on the left and the text "Authenticate below to start the reinstall process." on the right. Below this, there are two tabs: "PASSWORD" (which is selected and underlined) and "SMARTCARD". Under the "PASSWORD" tab, the username "admin" is entered. Below the username is a password input field with a placeholder "password" and a toggle icon on the right. At the bottom of the form is a large blue button labeled "Reinstall".

Enter valid administrator credential and click Reinstall. It should only take a few seconds to enable the PBA. Click OK to shut down.

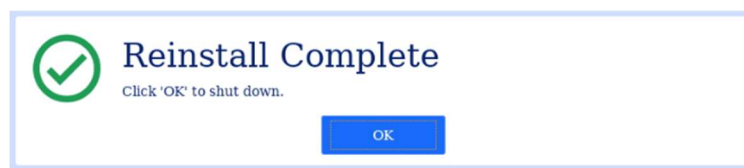

The PBA environment should once more present the normal login screen.


## 7 Updating the Cigent PBA software

For information on obtaining the newest version of the Cigent PBA software see section [Initial installation overview](#).

To update the Cigent PBA software to a newer version you will need the following:

1. An installation USB drive of the newer version of Cigent PBA installed on the device  
(See section [Create a bootable USB 3.0 thumb drive](#))
2. Administrator credentials to the PBA environment

When you are ready to update the Cigent PBA software, boot to the USB drive containing the newer version of the software. The system will detect that a PBA environment is already installed and present an upgrade login screen.

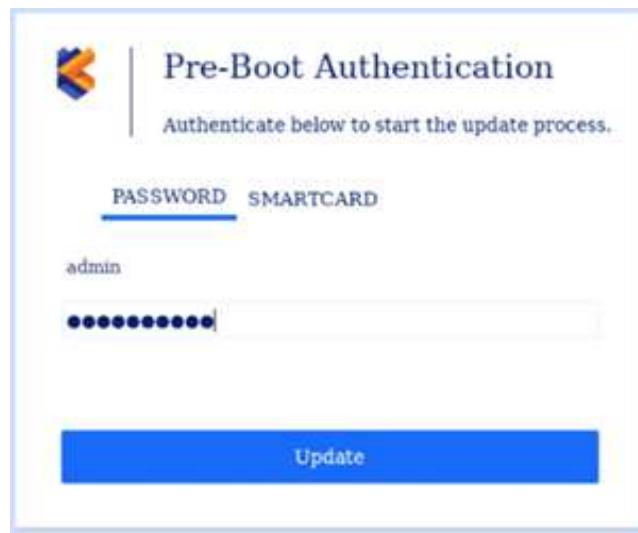


Enter valid administrator credentials and click Update. The process will take about 10 minutes to complete. Once complete shutdown the system and remove the USB drive.

The PBA environment should once more present the normal login screen.

## 8 Logging in and Logging Out

### 8.1 Logging in with a username and password

1. Power on the computer and wait for the PBA authentication screen to appear.
2. Enter your username and password.
3. Click Log in.

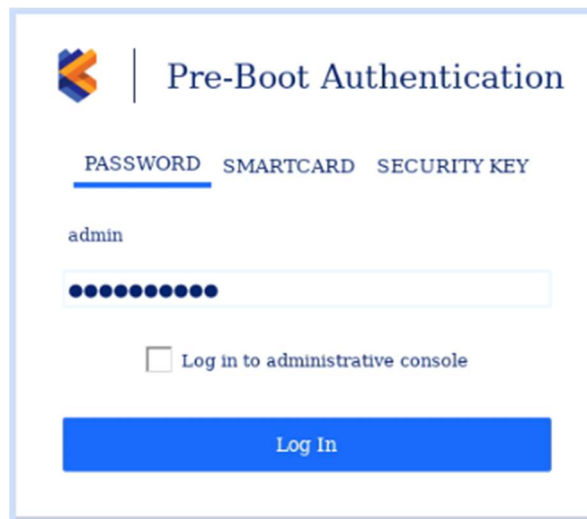


The image shows a Pre-Boot Authentication (PBA) screen. At the top left is a logo consisting of three stylized 'K' shapes in blue, orange, and yellow. To the right of the logo is the text 'Pre-Boot Authentication'. Below this, there are three tabs: 'PASSWORD' (which is underlined with a blue line), 'SMARTCARD', and 'SECURITY KEY'. Under the 'PASSWORD' tab, the username 'admin' is entered. Below the username is a password field represented by a series of black dots. Below the password field is a checkbox labeled 'Log in to administrative console'. At the bottom of the screen is a large blue button with the text 'Log In' in white.

If the authentication is successful, your system will reboot and automatically start your operating system.

## 8.2 Logging in with a Smart Card

1. Power on the computer and wait for the PBA authentication screen to appear.
2. Click Smart Card.
3. Enter your Username and PIN.
4. Click Log In.

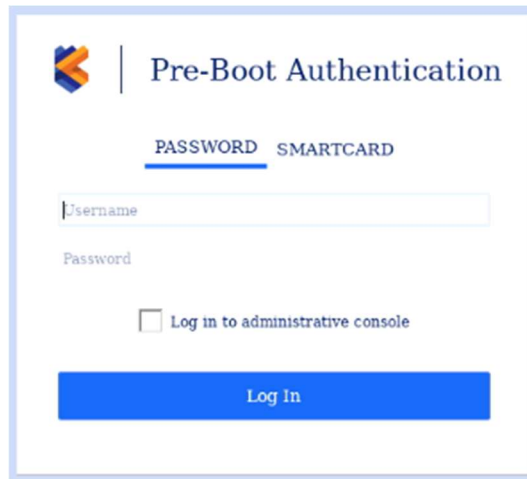


The image shows a 'Pre-Boot Authentication' window. It features a logo on the top left and the title 'Pre-Boot Authentication' on the top right. Below the title are two tabs: 'PASSWORD' (which is underlined) and 'SMARTCARD'. There are two input fields: 'Username' and 'Password'. Below these fields is a checkbox labeled 'Log in to administrative console'. At the bottom is a blue button labeled 'Log In'.

If the authentication is successful, your system will reboot and automatically start your operating system.


## 8.3 Logging in with Two Factor Authentication

When the “Require Two-Factor Authentication” setting is enabled, all users must authenticate with a password and smartcard. The Login page will first ask for the password then the smartcard PIN. If both factors are verified, the login will be successful.

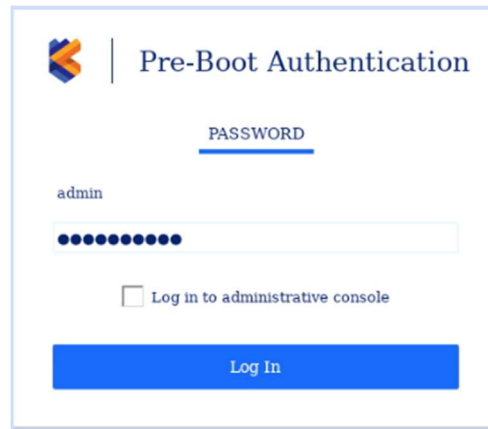

The image shows a Pre-Boot Authentication (PBA) screen. At the top left is a logo consisting of two overlapping squares, one blue and one orange. To the right of the logo is the text "Pre-Boot Authentication". Below this, the word "PASSWORD" is underlined. There is a text input field containing the username "admin". Below the username field is a password field represented by a series of black dots. Below the password field is a checkbox labeled "Log in to administrative console". At the bottom of the screen is a large blue button labeled "Log In".

1. Power on the computer and wait for the PBA authentication screen to appear.
2. Enter the username and password.
3. Click Log In.

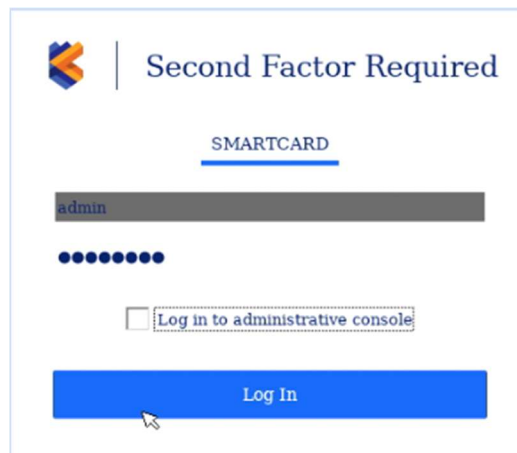

The image shows a Second Factor Required screen. At the top left is the same logo as the previous screen. To the right of the logo is the text "Second Factor Required". Below this, the word "SMARTCARD" is underlined. There is a text input field containing the username "admin". Below the username field is a PIN field represented by a series of black dots. Below the PIN field is a checkbox labeled "Log in to administrative console". At the bottom of the screen is a large blue button labeled "Log In". A mouse cursor is pointing at the "Log In" button.

4. Insert your smartcard.
5. Enter the PIN.
6. Click Log In.

If the authentication is successful, your system will reboot and automatically start your operating system.

## 8.4 Logging out of the PBA Administrative console

When you have finished using the administrative console you must Power Off using the button at the bottom left corner of the screen. There is no explicit log off capability. If you wish to enter the operating system, you power off, then power on.

## 9 Troubleshooting

### 9.1 Replacing or recovering from a drive failure

In a system where the PBA is protecting more than one drive, the recovery procedure will depend on whether the drive to be replaced was primary or secondary. A failure of the primary drive will result in a system that is unable to boot to the PBA. A system with a failed secondary drive will still boot to the PBA. Follow the appropriate procedure below depending on whether the primary or secondary is being replaced or has failed.

#### 9.1.1 Replacing or recovering from a failed secondary drive.

1. Shutdown the system.
2. Install the replacement SSD.
3. Power on the system.
4. Log in to the PBA administrative console and navigate to the Drives page.
5. Add the new secondary drive following instructions in 4.4.1.2 **Add Secondary drive(s)**.
6. Shutdown and restart the system.

#### 9.1.2 Replacing or recovering from a failed primary drive.

1. Shutdown the system.
2. Create a bootable thumb drive with the same version of PBA software on it as was previously installed. (Following instructions in section 3.5 **Create a bootable USB 3.0 thumb drive** )
3. Boot to the USB thumb drive.
4. Install the PBA to the primary drive. Note the secondary drives will NOT display for selection as they already contain a PBA environment. For instructions on how to install the PBA see section 3.7 **Install the Cigent PBA**.
5. Boot the system.
6. The Login page should indicate Secondary drive(s) found.
7. Log into the PBA administrative console and navigate to the Drives page.
8. Import each of the secondary drives one at a time. For instructions on importing secondary drives, see section 4.4.1.3 **Import Secondary drive(s)**

For more information about Cigent Secure SSDs please visit [www.cigent.com](http://www.cigent.com)

©2023 Cigent Technology Inc. All rights reserved. Cigent is a registered trademark of Cigent Technology Inc. in the United States and other jurisdictions.